


ITEM	QTY -025	P/N	DESCRIPTION
	X	D119-796-025	STD GEAR WITH TRAINING WEARPLATES
1	2	D119-646-241	STD SKIDTUBE WITH TRAINING WEARPLATES
2	1	D119-796-151	XTUBE ASSY (AW119 MKII FWD)
3	1	D119-796-251	XTUBE ASSY (AW119 MKII AFT)
4	48	D2652	BUSHING
5	2	D3407-041	TOW RING
6	4	D3417-5	WASHER
7	2	D3456-1	WASHER
8	48	D3672-3	PHENOLIC WASHER
9	48	D3672-7	PHENOLIC WASHER
10	2	D3883-1	SADDLE, OUTBOARD LH
11	2	D3883-2	SADDLE, OUTBOARD RH
12	2	D3884-1	SADDLE, INBOARD LH
13	2	D3884-2	SADDLE, INBOARD RH
14	4	D3886-041	LUG ASSEMBLY
15	8	AN3C46A	BOLT
16	16	AN3C50A	BOLT
17	24	AN4C6A	BOLT
18	24	MS21043-3	NUT, SELF-LOCKING
19	26	MS21043-4	NUT, SELF-LOCKING
20	8	MS21043-5	NUT, SELF-LOCKING
21	8	MS21250-05048	BOLT
22	24	NAS1149C0332R	WASHER
23	48	NAS1149C0432R	WASHER
24	16	NAS1149C0532R	WASHER

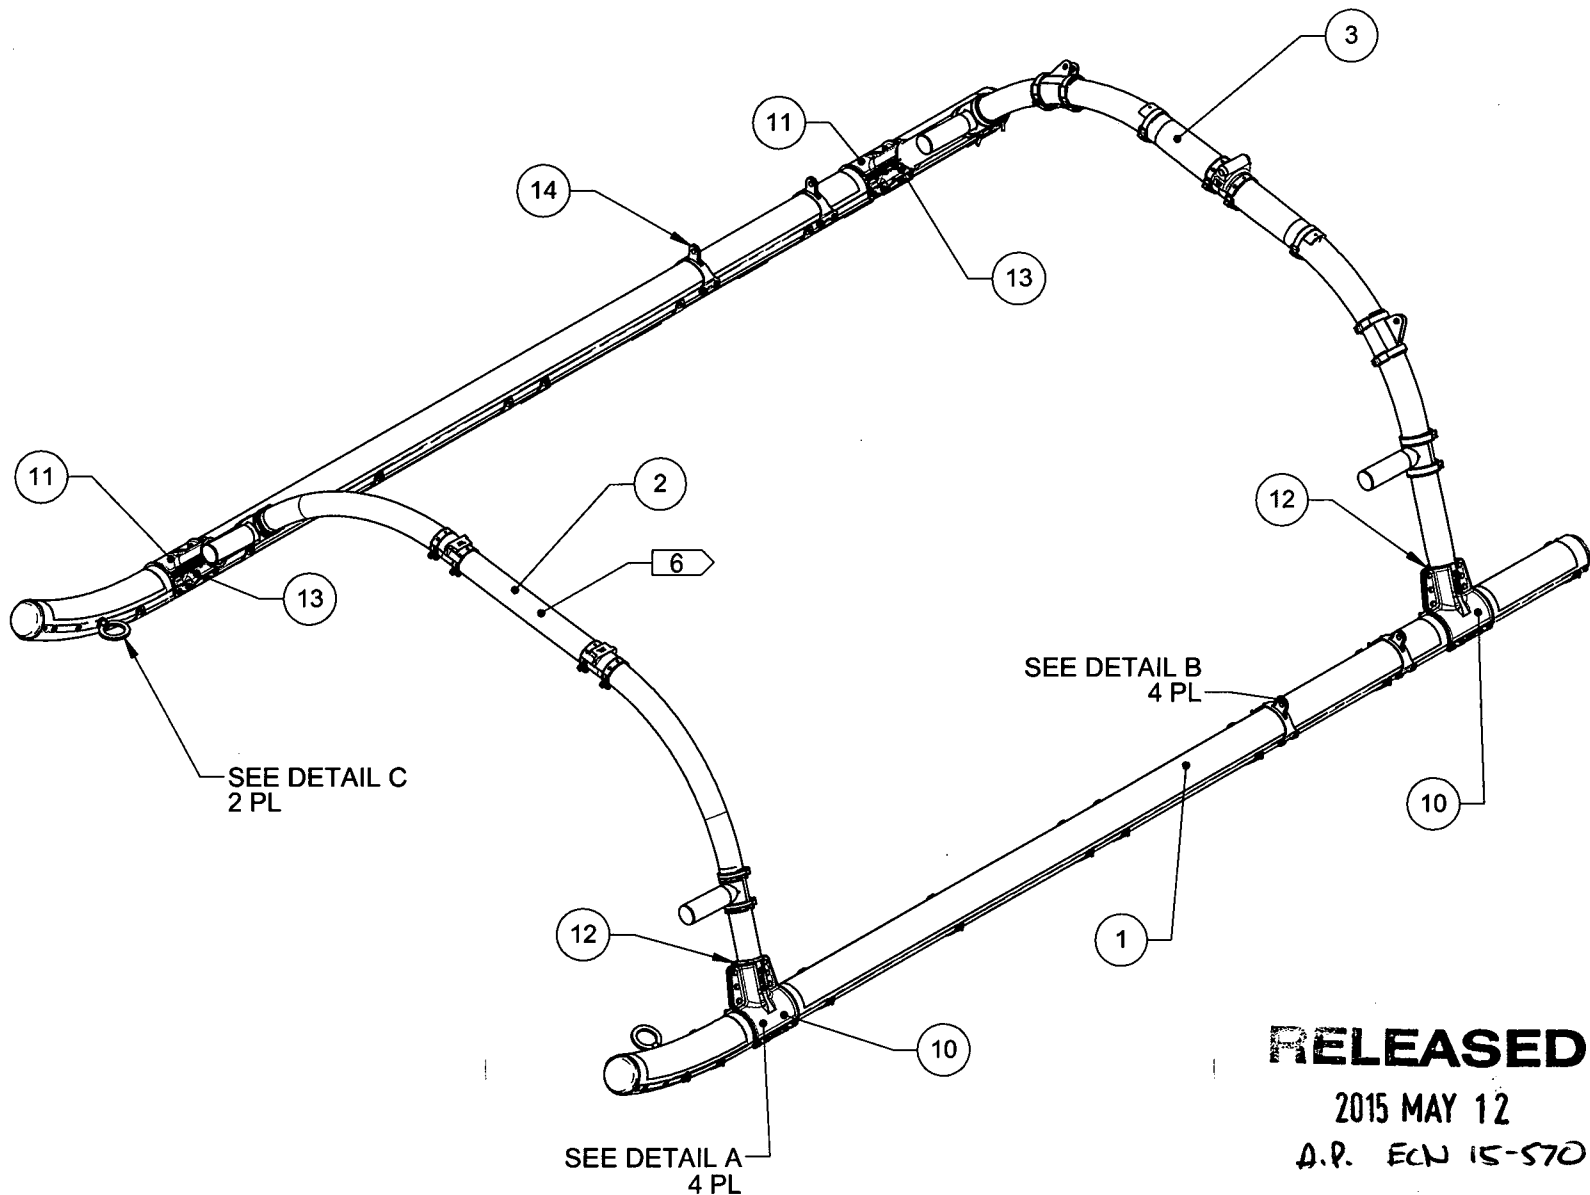


**RELEASED**  
2015 MAY 12  
A.P. ECN 15-570

**D119-796-025 STD GEAR WITH TRAINING WEARPLATES**

NOTES:  
1) MATERIAL: N/A  
2) FINISH: NONE  
3) TOLERANCES: N/A  
4) UNITS: N/A  
5) BREAK SHARP EDGES: N/A  
6) IDENTIFICATION: INSTALL D2729-4 RED DECAL IN LOCATION SHOWN  
7) WEIGHT: 147.9 LBS

APPROVED	DESIGN	AP	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
	DRAWN	AP		
	CHECKED	AJS		
	MFG. APPR.	DD	DRAWING NO. <b>D119-796-025</b>	REV. A SHEET 1 OF 4
	APPROVED	HS	TITLE	SCALE
	DE APPR.	DS	STD GEAR WITH TRAINING WEARPLATES	NTS
	DATE	15.04.01	COPYRIGHT © 2014 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

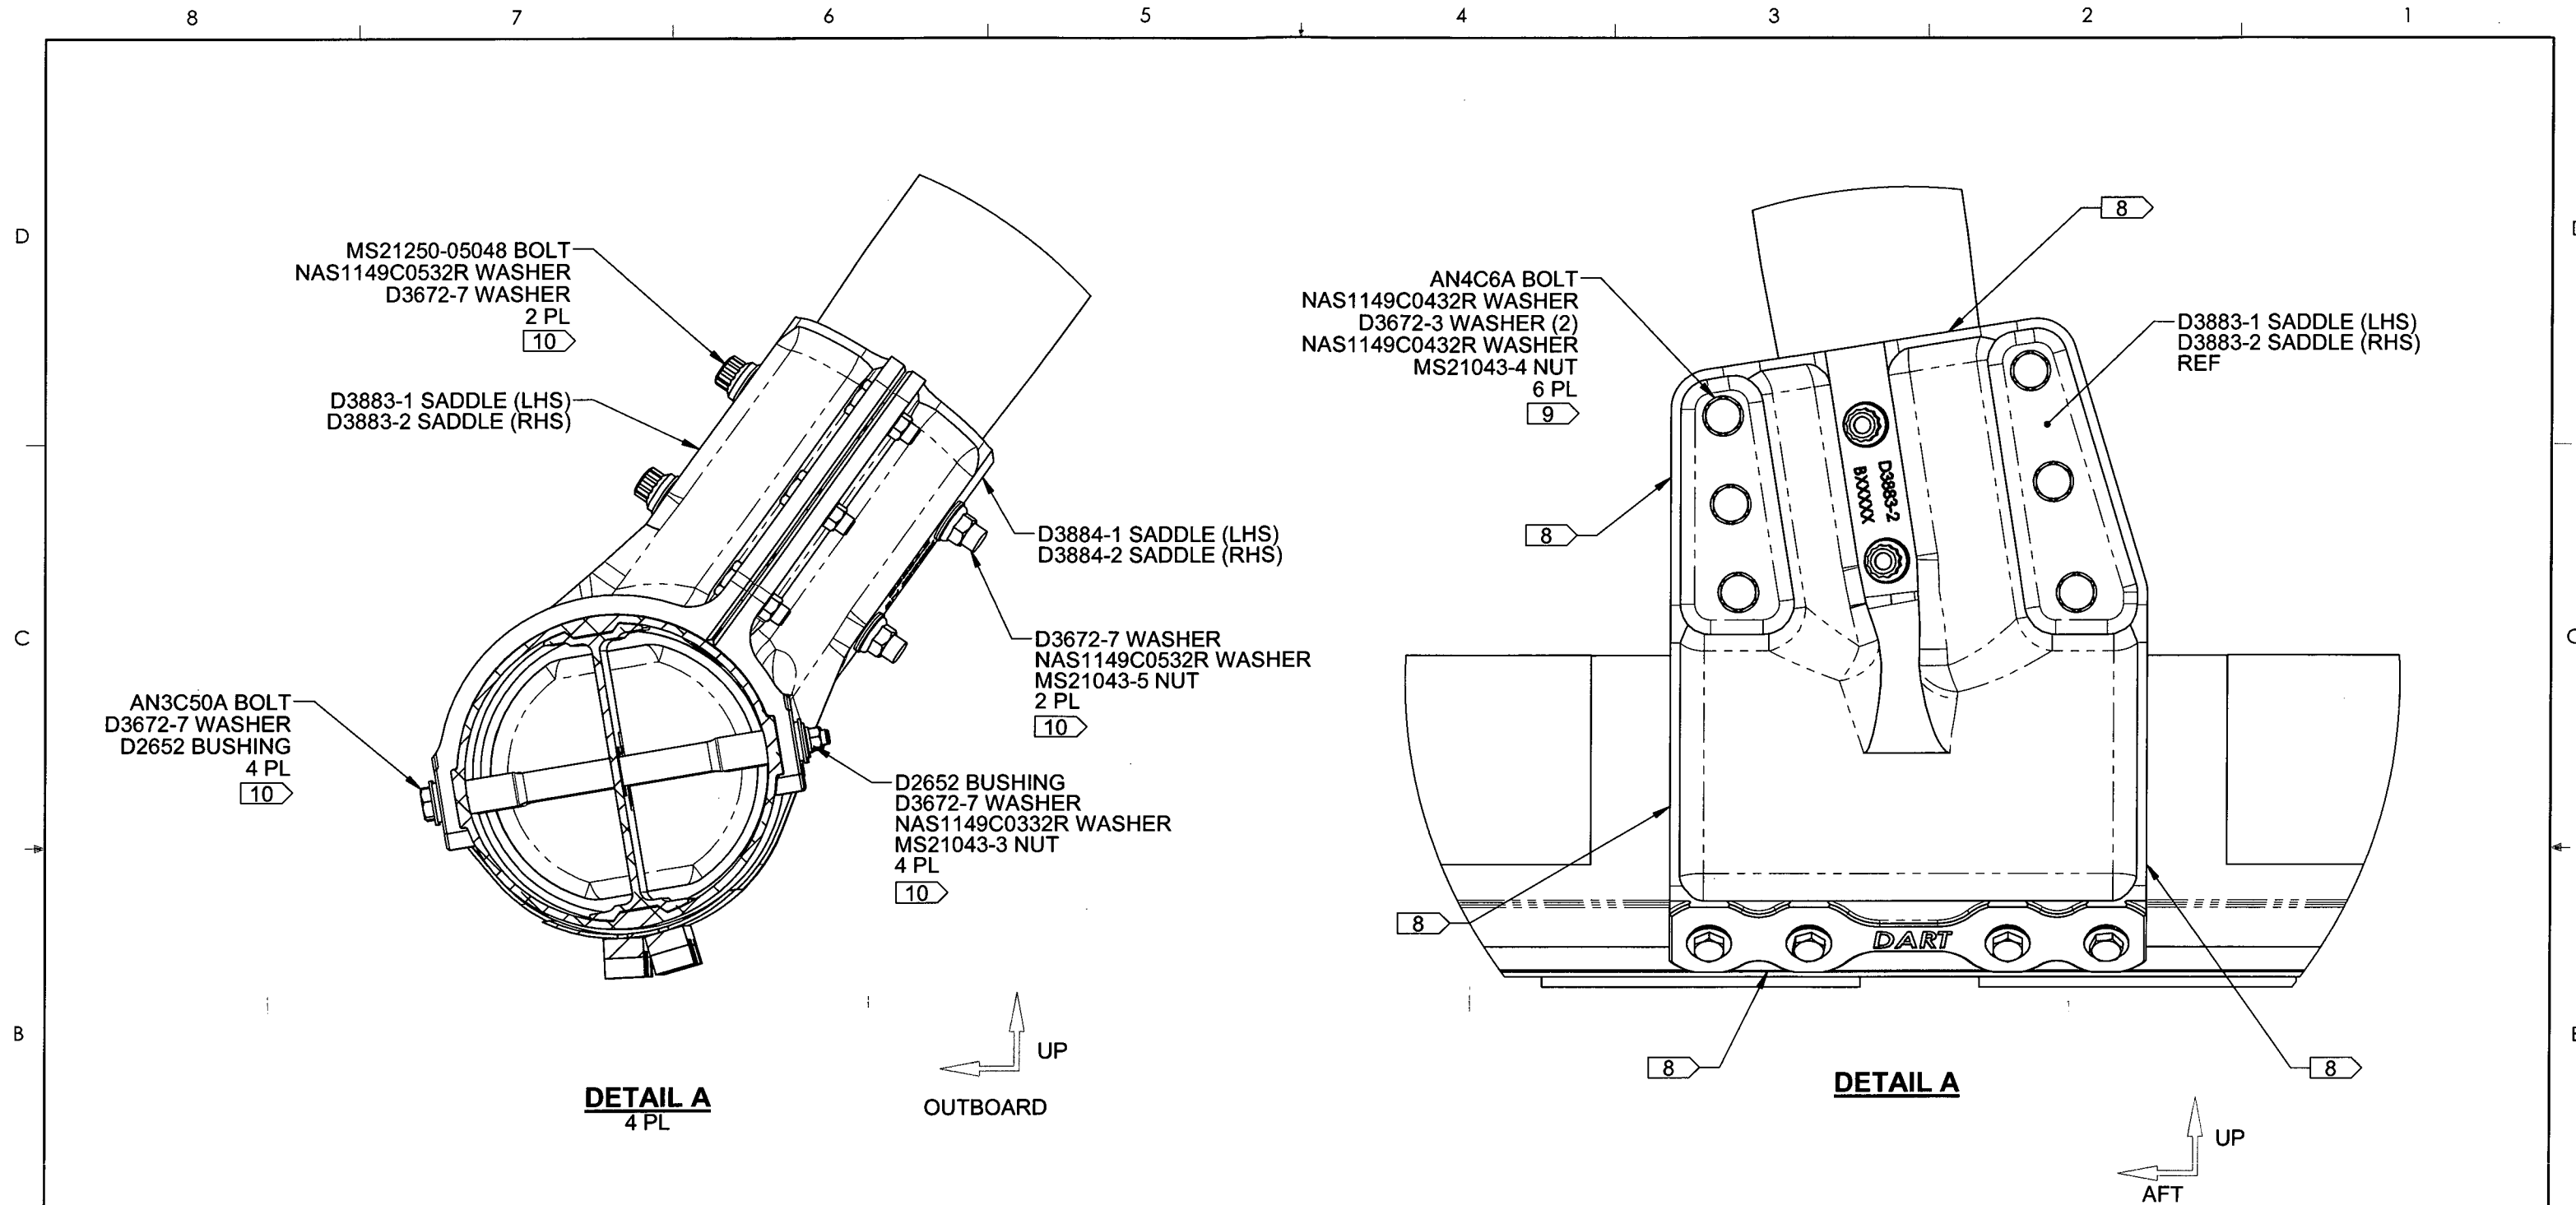


**RELEASED**  
15 MAY 12

- NOTES:**
- 1) MATERIAL: N/A
  - 2) FINISH: NONE
  - 3) TOLERANCES: N/A
  - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
  - 5) BREAK SHARP EDGES: N/A
  - 6) IDENTIFICATION: N/A
  - 7) WEIGHT: N/A
  - 8) APPLY A CONTINUOUS BEAD OF SIKAFLEX -241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS B2 SEALANT IN THE LOCATIONS SHOWN INCLUDING THE FOLLOWING:
    - A) ALONG SADDLE/CROSSTUBE INTERFACE
    - B) BETWEEN THE SADDLE FLANGES
    - C) ALONG SADDLE/SKIDTUBE INTERFACE
  - 9) LIGHTLY TIGHTEN ALL BOLTS IN THE NUMERICAL ORDER SPECIFIED ON SHEET 3, THEN TIGHTEN TO SPECIFIED TORQUE IN TABLE 1.
  - 10) INSTALL WET WITH SIKAFLEX -241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS B2 SEALANT
  - 11) ALL NUTS TO BE INSTALLED ON THE INBOARD SIDE

APPROVED

DESIGN	AP	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	AP		
CHECKED	AJS	DRAWING NO.	REV. A
MFG. APPR.	DD	<b>D119-796-025</b>	SHEET 2 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	<b>STD GEAR WITH TRAINING WEARPLATES</b>	NTS
DATE	<b>15.04.01</b>	COPYRIGHT © 2014 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

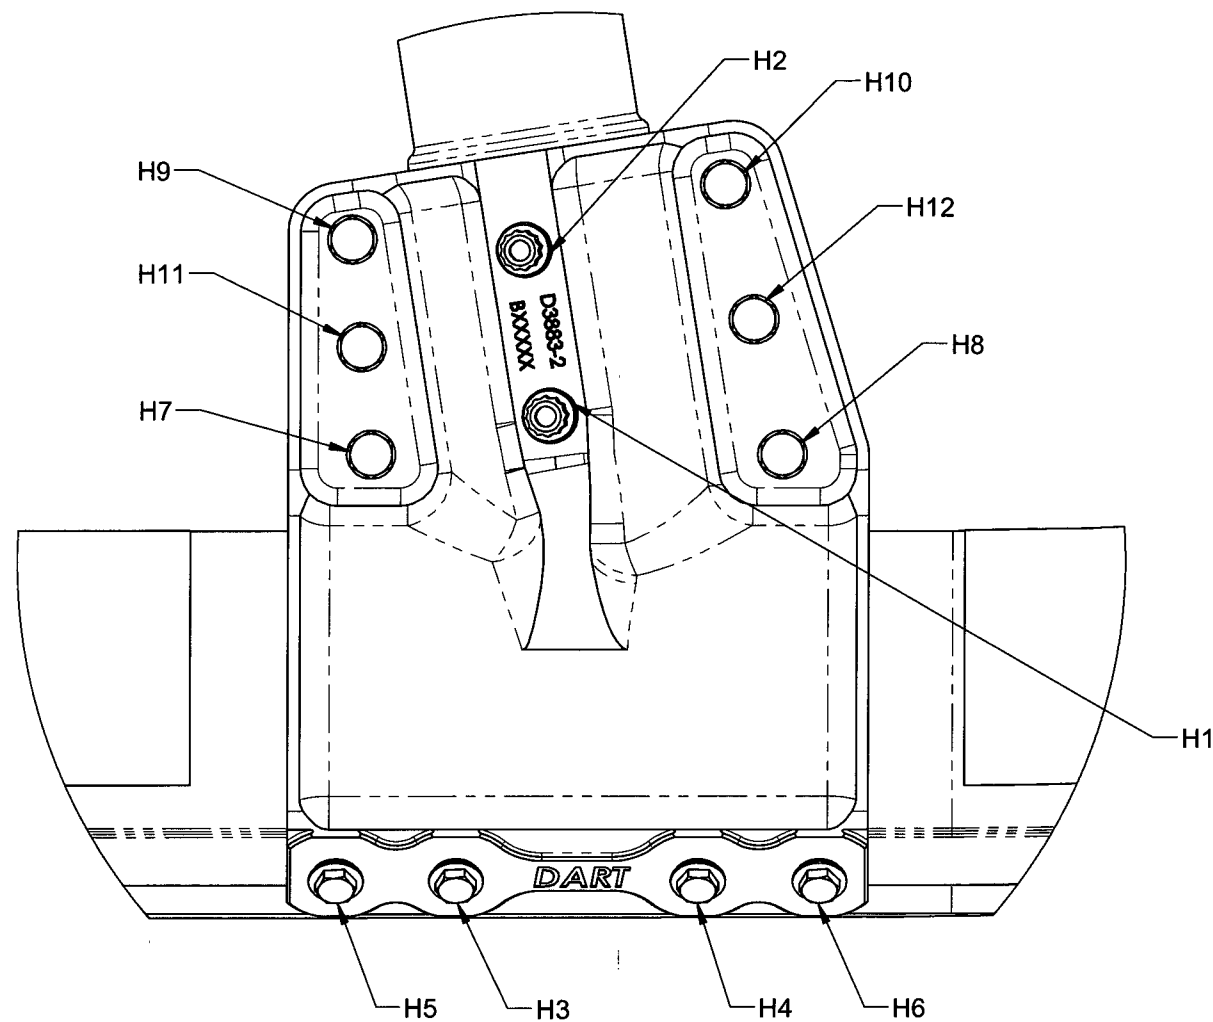

**SUPPLEMENTAL VIEW - TORQUE SEQUENCE**

**TABLE 1: TORQUE SEQUENCE AND MAX TORQUE**

TORQUE SEQUENCE	PART NUMBER	TORQUE
H1	MS21250-05048	66-85 IN-LBS (7.3 - 9.6 n-m)
H2	MS21250-05048	66-85 IN-LBS (7.3 - 9.6 n-m)
H3	AN3C50A	15-25 IN-LBS (1.7 - 9.6 N-m)
H4	AN3C50A	15-25 IN-LBS (1.7 - 9.6 N-m)
H5	AN3C50A	15-25 IN-LBS (1.7 - 9.6 N-m)
H6	AN3C50A	15-25 IN-LBS (1.7 - 9.6 N-m)
H7	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)
H8	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)
H9	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)
H10	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)
H11	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)
H12	AN4C6A	50-70 IN-LBS (5.7 - 7.9 N-m)

**RELEASED**

A.R. 2015 MAY 12


APPROVED

DESIGN	AP	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	AP		
CHECKED	AJS	DRAWING NO.	REV. A
MFG. APPR.	DD	<b>D119-796-025</b>	SHEET 3 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	<b>STD GEAR WITH TRAINING WEARPLATES</b>	NTS
DATE	<b>15.04.01</b>	<small>COPYRIGHT © 2014 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

D

D3407-041 TOW RING  
D3417-5 WASHER  
9

INBOARD

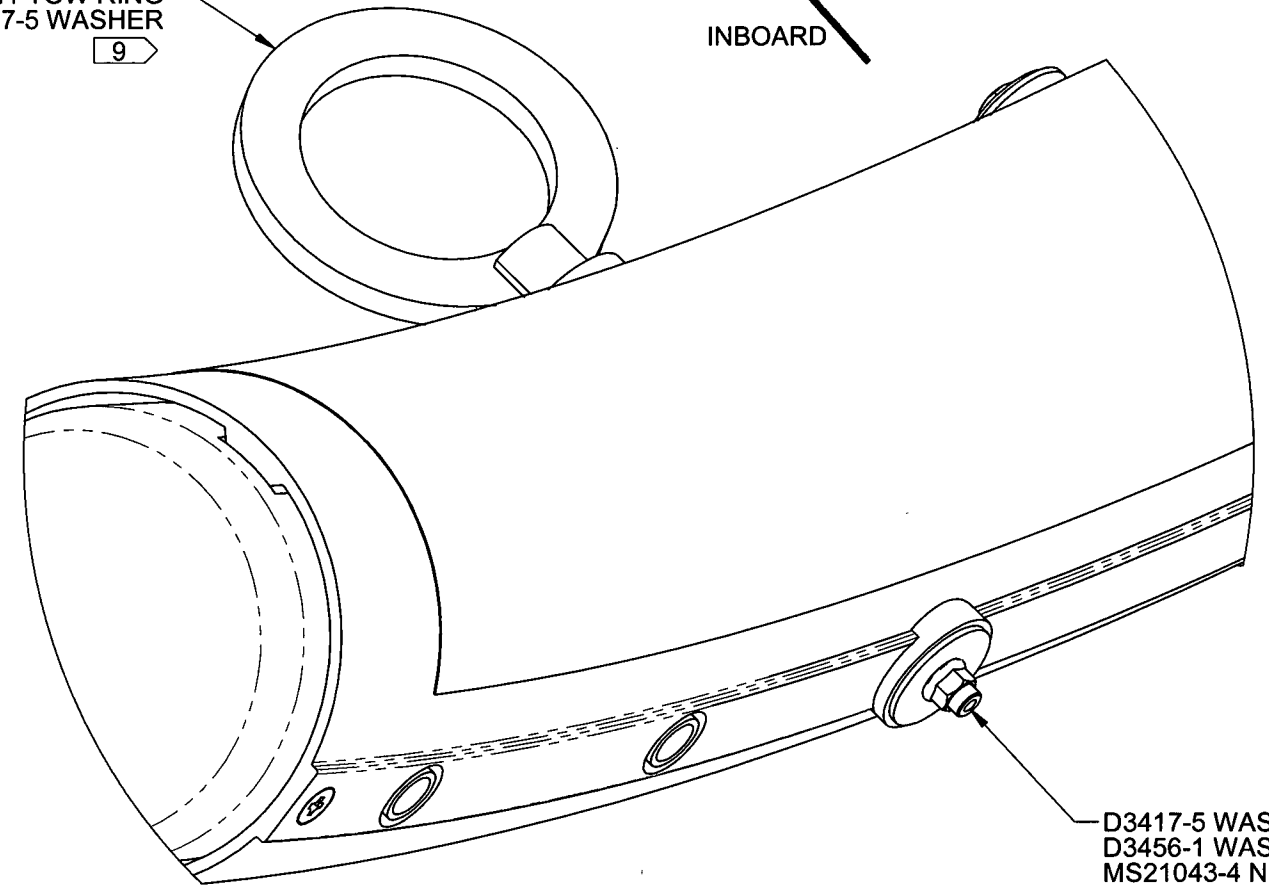

D3417-5 WASHER  
D3456-1 WASHER  
MS21043-4 NUT  
8 9 11

**DETAIL C**  
2 PL

C

B

A


- NOTES:**  
1) MATERIAL: N/A  
2) FINISH: NONE  
3) TOLERANCES: N/A  
4) UNITS: INCHES UNLESS OTHERWISE NOTED  
5) BREAK SHARP EDGES: N/A  
6) IDENTIFICATION: N/A  
7) WEIGHT: N/A  
8) INSTALL WET WITH SIKAFLEX -241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS B2 SEALANT  
9) APPLY FAY SEAL AND FILLET SEAL USING SIKAFLEX -241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS B2 SEALANT  
10) TORQUE AN3 HARDWARE TO 20-25 IN-LBS  
11) TORQUE AN4 HARDWARE TO 50-70 IN-LBS

D

D3886-041 LUG ASSEMBLY  
9

INBOARD

D2652 BUSHING  
NAS1149C0332R WASHER  
MS21043-3 NUT  
2 PL  
8 9 10

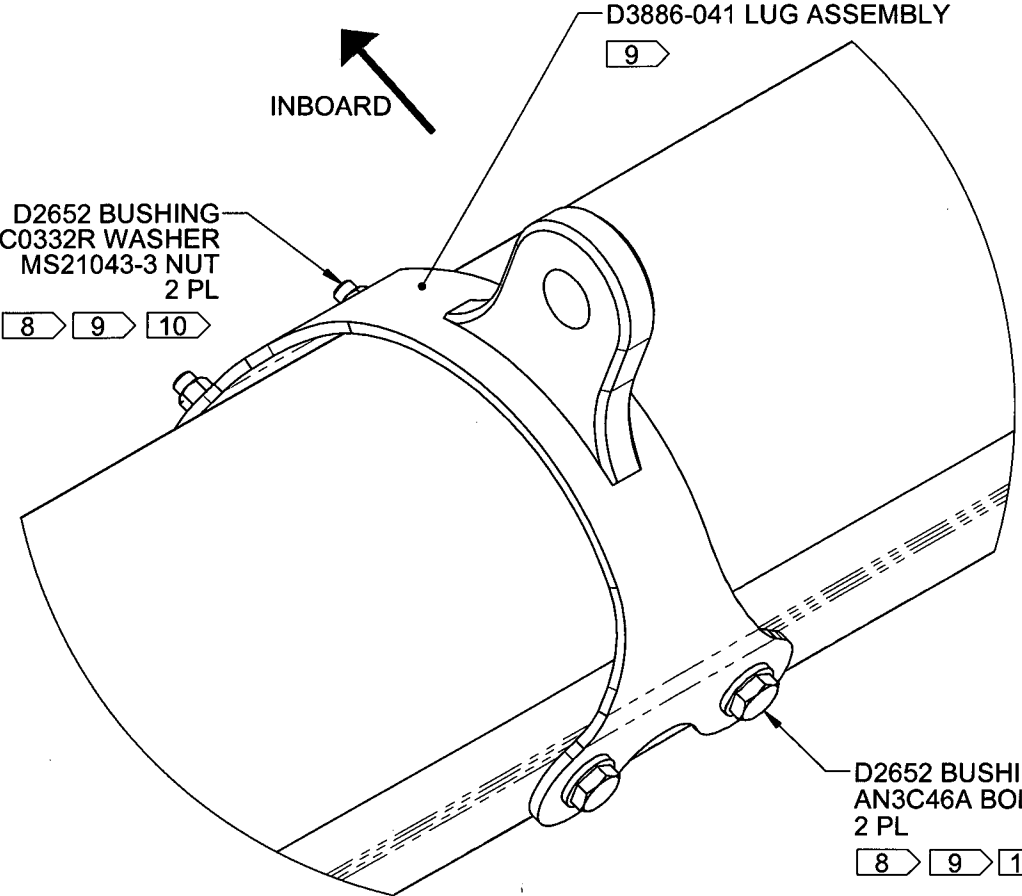

D2652 BUSHING  
AN3C46A BOLT  
2 PL  
8 9 10

**DETAIL B**  
4 PL

**RELEASED**  
P.P. 2015 MAY 12

C

B

A

APPROVED

DESIGN	AP	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	AP		
CHECKED	AJS	DRAWING NO. <b>D119-796-025</b>	REV. A
MFG. APPR.	DD		SHEET 4 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STD GEAR WITH TRAINING WEARPLATES	NTS
DATE	15.04.01	COPYRIGHT © 2014 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	